

## Split Pipe Clamp With Rubber

EPDM Rubber insulation For Noise Reduction Compliant With DIN 4109

Material: Carbon Steel

Size Range: 3/8 through 8


Finish: Electro-zinc Platod

ME Side Screws With Two Pieces of Gasket

M8+M10 Nuts for size 3/8 through 2

M10-M12 Nuts for size 2 1/2" through 6"

Mitā Nuts for size a

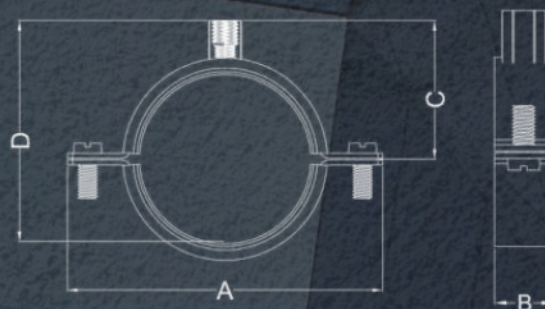

Nominal Pipe Size			Max. Rec. Load		Rod Size	A		B		C		D	
IN	MM		IBS	KG	MM	IN	MM	IN	MM	IN	MM	IN	MM
3/8"	Φ 18	15-19	440	200	M8/M10	2 1/3"	60	4/5"	20	1"	26	1 3/7"	36
1/2"	Φ 22	20-25	440	200	M8/M10	2 5/9"	65	4/5"	20	1 1/7"	29	1 2/3"	43
3/4"	Φ 28	26-30	440	200	M8/M10	2 3/4"	70	4/5"	20	1 1/4"	32	2"	50
1"	Φ 35	32-36	440	200	M8/M10	2 1/3"	85	4/5"	20	1 3/7"	36	2 1/5"	56
1-1/4"	Φ 42	38-43	440	200	M8/M10	3 5/8"	92	4/5"	20	1 1/2"	39	2 1/2"	63
1-1/2"	Φ 48	47-51	440	200	M8/M10	3 6/7"	98	4/5"	20	1 2/3"	42	2 5/6"	72
-	Φ 54	53-58	440	200	M8/M10	4"	104	4/5"	20	1 7/9"	45	3"	75
2"	Φ 60	60-64	440	200	M8/M10	4 1/3"	110	4/5"	20	1 8/9"	48	3 1/5"	81
-	Φ 63	63-66	440	200	M8/M10	4 1/2"	115	4/5"	20	2"	51	3 1/2"	88
-	Φ 70	68-72	440	200	M8/M10	4 5/7"	120	4/5"	20	2"	53	3 4/7"	91
2-1/2"	Φ 75	75-80	440	200	M8/M10	5"	125	4/5"	20	2 1/5"	56	3 7/9"	96
-	Φ 83	81-86	440	200	M8/M10	5 1/2"	139	4/5"	20	2 1/3"	60	4 1/4"	108
3"	Φ 90	87-92	440	200	M8/M10	5 3/4"	146	4/5"	20	2 1/2"	63	4 3/8"	111
3-1/2"	Φ 100	99-105	440	200	M8/M10	6 1/7"	156	4/5"	20	2 2/3"	68	4 3/4"	121
-	Φ 110	109-112	440	200	M8/M10	6 1/2"	166	4/5"	20	2 7/8"	73	5 1/6"	131
4"	Φ 115	113-118	440	200	M8/M10	6 3/4"	171	4/5"	20	3"	76	5 1/3"	136
-	Φ 125	125-130	440	200	M8/M10	7 1/8"	181	4/5"	20	3 1/5"	81	5 3/4"	146
-	Φ 133	132-137	440	200	M8/M10	7 1/4"	184	4/5"	20	3 1/3"	85	6 1/9"	155
5"	Φ 140	138-142	660	299	M8/M10	7 5/7"	196	4/5"	20	3 1/2"	88	6 1/3"	161
-	Φ 150	148-152	660	299	M8/M10	8 1/9"	206	4/5"	20	3 2/3"	93	6 3/4"	171
-	Φ 160	159-166	660	299	M8/M10	8 1/2"	216	1"	25	3 6/7"	98	7 1/8"	181
6"	Φ 168	168-172	660	299	M8/M10	8 5/6"	224	1"	25	4"	102	7 4/9"	189
-	Φ 200	200-212	660	299	M8/M10	10"	256	1"	25	4 2/3"	118	8 5/7"	221
8"	Φ 220	215-220	660	299	M8/M10	10 6/7"	276	1"	25	5"	128	9 1/2"	241
-	Φ 250	248-252	660	299	M8/M10	12"	306	1"	25	5 5/8"	143	10 2/3"	271
-	Φ 315	313-318	660	299	M8/M10	14 3/5"	371	1"	25	7"	176	13 2/9"	336

Measurements are subject to 5% tolerance Due to continuous improvement, product specifications are subject to change without prior notice.