


LIX-205

Split Pipe Clamp

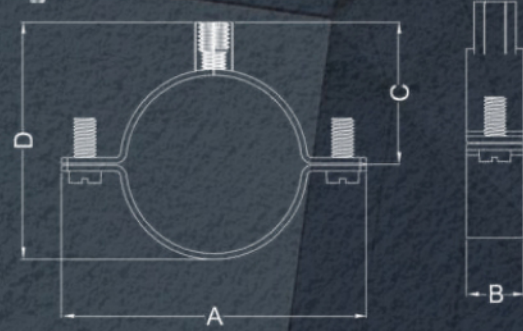

Material Carbon Steel
Size Range: 3/8 through 6
Finish: Hecten-zinc Plated
ME Side Screws With Two Pieces ul Gasket
MB+M10 Nuts for size 3/8' through 2
M10+M12 Nuts for size 2 1/2 through 6
M16 Nuts for size 8

Nominal Pipe Size			Max. Rec.Load		Rod Size	A		B		C		D	
IN	MM		IBS	KG	MM	IN	MM	IN	MM	IN	MM	IN	MM
3/8"	Φ 18	15-19	440	200	M8/M10	2 1/3	59	4/5	20	1	23	1 1/6	30
1/2"	Φ 22	20-25	440	200	M8/M10	2 3/5	66	4/5	20	1	26	1 1/2	37
3/4"	Φ 28	26-30	440	200	M8/M10	2 5/6	72	4/5	20	1 1/7	29	1 2/3	43
1"	Φ 35	32-36	440	200	M8/M10	3 1/9	79	4/5	20	1 2/7	33	2	50
1-1/4"	Φ 42	38-43	440	200	M8/M10	3 2/5	86	4/5	20	1 3/7	36	2 1/4	57
1-1/2"	Φ 48	47-51	440	200	M8/M10	3 5/8	92	4/5	20	1 1/2	39	2 1/2	63
-	Φ 54	53-58	440	200	M8/M10	3 6/7	98	4/5	20	1 2/3	42	2 5/7	69
2"	Φ 60	60-64	440	200	M8/M10	4	104	4/5	20	1 7/9	45	3	75
-	Φ 63	63-66	440	200	M8/M10	4 1/4	108	4/5	20	1 6/7	47	2 5/6	72
-	Φ 70	68-72	440	200	M8/M10	4 1/2	114	4/5	20	2	50	3 1/3	85
2-1/2"	Φ 75	75-80	440	200	M8/M10	4 2/3	119	4/5	20	2	53	3 1/2	90
-	Φ 83	81-86	440	200	M8/M10	5	127	4/5	20	2 1/4	57	3 6/7	98
3"	Φ 90	87-92	440	200	M8/M10	5 2/7	134	4/5	20	2 1/3	60	4 1/7	105
3-1/2"	Φ 100	99-105	440	200	M8/M10	5 2/3	144	4/5	20	2 5/9	65	4 1/2	115
-	Φ 110	109-112	440	200	M8/M10	6 1/2	164	4/5	20	2 3/4	70	5	125
4"	Φ 115	113-118	440	200	M8/M10	6 1/4	159	4/5	20	2 7/8	73	5 1/8	130
-	Φ 125	125-130	440	200	M8/M10	6 2/3	169	4/5	20	3	78	5 1/2	140
-	Φ 133	132-137	440	200	M8/M10	7	177	4/5	20	3 2/9	82	5 5/6	148
5"	Φ 140	138-142	660	299	M8/M10	7 1/4	184	4/5	20	3 1/3	85	6 1/9	155
-	Φ 150	148-152	660	299	M8/M10	7 2/3	194	4/5	20	3 1/2	90	6 1/2	165
-	Φ 160	159-166	660	299	M8/M10	8	204	1	25	3 3/4	95	6 8/9	175
6"	Φ 168	168-172	660	299	M8/M10	8 1/3	212	1	25	3 8/9	99	7 1/5	183
-	Φ 200	200-212	660	299	M8/M10	9 3/5	244	1	25	4 1/2	115	8 1/2	215
8"	Φ 220	215-220	660	299	M8/M10	10 2/5	264	1	25	5	125	9 1/4	235
-	Φ 250	248-252	660	299	M8/M10	11 4/7	294	1	25	5 1/2	140	10 3/7	265
-	Φ 315	313-318	660	299	M8/M10	14 1/7	359	1	25	06 4/5	173	13	330

Measurements are subject to 5% tolerance

Due to continuous improvement, product specifications are subject to change without prior notice.