


LIX-325

Turnbuckle

3/ through 2.1/2" rod size

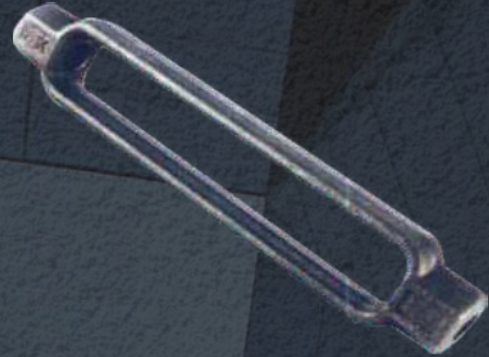

Forged Steel

Bare Metal

Complies with MSS SP-58 and SP-59 (Type A)

.(13)

Designed as an adjustable hanger rod connection

Specify rod size, figure number, name and finish

,Also available in Electro-Plated Zinc

Stainless Steel and Hot Dipped Galvanized

.Trapped right hand and left hand thread

.Large rod size available upon request

.Different openings available upon request



Rod Size	Design Load	Recom. Max. Load (lbs) @ 650° F	Approx Wt per 100 6" opening
D	A		
3/8	6	730	42
1/2	6	1350	65
5/8	6	2160	98
3/4	6	3230	145
7/8	6	4480	185
1	6	5900	260
1 1/4	6	9500	445
1 1/2	6	13800	640
1 3/4	6	18600	1100
2	6	24600	1490
2 1/4	6	32300	1960
2 1/2	6	39800	2690

* Measurements are subject to \pm 5% tolerance

* Due to continuous improvement, product specifications are subject to change without prior notice.