

LIX-102 CLEVIS HANGER

Heavy Duty Adjustable Clevis Hanger

Material: Carbon Steel

Size Range: through 24"

Finish Electra Galvanized/Zinc Rich Composite

UL/FM Approved Upto 8 size


Comply with Federal Specification WW-H-171E and American
Manufactures Standardization Society MSS SP-69 & SF58 (Type 1)

Also Available With Felt-lining & EPDM RUBBER LINING



WITH FELT LINING

WITH EPDM
RUBBER LINING

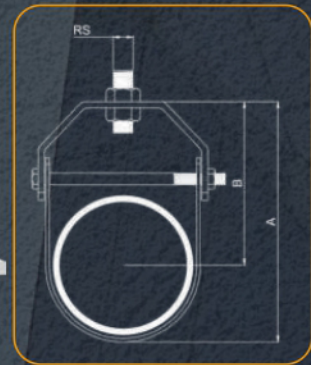

Nominal Pipe Size	Max. Rec. Load		Rod Size (RS)		A		B	
	IBS	KG	IN	MM	IN	MM	IN	MM
1/2"	610	277	3/8	M10	2	51.0	1 1/2	37.6
3/4"	610	277	3/8	M10	2 2/7	58.4	1 2/3	42.3
1"	610	277	3/8	M10	2 3/4	70.0	2	50.5
1-1/4"	610	277	3/8	M10	3 1/3	84.0	2 1/3	59.9
1-1/2"	610	277	3/8	M10	4	100.0	2 7/8	72.9
2"	610	277	3/8	M10	4 1/2	114.3	3 1/5	81.2
2-1/2"	1130	513	1/2	M12	5 2/9	132.7	3 2/3	92.7
3"	1130	513	1/2	M12	6	152.6	4 1/9	104.4
3-1/2"	1130	513	1/2	M12	6 3/5	167.8	4 1/2	113.3
4"	1130	513	5/8	M16	7 5/9	192.0	5 1/8	130.4
5"	1430	649	5/8	M16	9 1/3	237.8	6 1/3	161.4
6"	1940	880	3/4	M20	10 5/7	272.3	7 1/8	181.2
8"	2000	907	3/4	M20	13 1/8	333.4	8 1/2	216.4
10"	3600	1633	7/8	M20	15 3/4	400.0	10	254.5
12"	3800	1724	7/8	M20	18 6/7	479.1	12 1/8	308.2
14"	4200	1905	1	M24	21 2/5	543.5	13 2/3	347.2
16"	4200	1905	1	M24	23 5/7	602.5	15	380.8
18"	4800	2177	1	M24	27 1/7	689.5	17 2/5	442.4
20"	4800	2177	1 1/4	M30	30	763.5	19 1/7	486.0
24"	4800	2177	1 1/4	M30	34 1/7	867.5	21 2/9	539.2

UL FM 9000 is only used with EPDM rubber lining

Measurements are share 5% terres

Que te continuous marovement, product specifications are subject to charge without print nasice